



Hf Compression Driver
BUILT FOR ACCURACY
CLARITY, AND SONIC POWER



2025 CATALOGUE



Zainus Pro HF Compression Driver Precision. Power. Perfection.

Premium High-Frequency Driver for Exceptional Clarity
& PowerZainus Pro HF Compression Drivers

are engineered for professionals who demand accurate high-frequency reproduction, maximum durability, and consistent performance.

Designed with precision components and advanced acoustic technology, each unit delivers outstanding clarity, fast transient response, and distortion-free output — even under extreme pressure.





T A B L E C O N T E N T

1
PAGE

ZA-450 XH

4
PAGE

ZA-550 XH

2
PAGE

ZA-750 XH

5
PAGE

ZA-750 G

3
PAGE

ZA-550 G



MODEL NO
ZA-450XH

P R O F E S S I O N A L
COMPRESSION DRIVER

IMPROVED DESIGN. IMPROVED PERFORMANCE



HIGH QUALITY
DRIVER



EASY TO
INSTALLATION



POWERFUL
FERRITE



**EXCLUSIVE FERRITE
DRIVER SPEAKER**






Model No.: ZA-450XH

Impedance : 8 Ohms
Max Power : 120 Watts
Voice Coil : 1.75"CCA

EASY MOUNTING TYPE

2" EXIT THROAT

POWERFUL FERRITE MAGNET

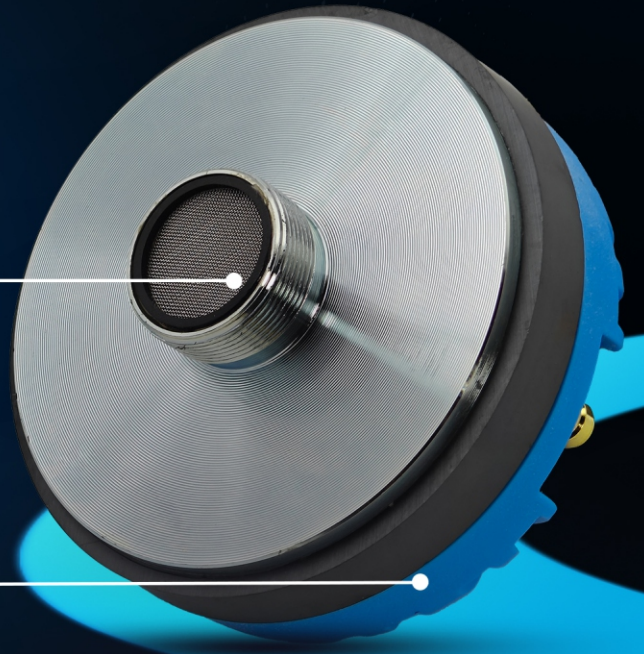

TECHNICAL SPECIFICATIONS

- THROAT DIAMETER: 1 INCH
- NOMINAL IMPEDANCE: 8 Ω
- MAGNET MATERIAL: STRONTIUM FERRITE
- MAX POWER HANDLING: 120W
- FREQUENCY RESPONSE: 1200HZ-20KHZ
- VOICE COIL DIAMETER: 1.75 INCH
- VOICE COIL MATERIAL: CCAW
- DIAPHRAGM MATERIAL: TITANIUM
- RMS POWER HANDLING: 60W
- MAGNET SIZES: 115×15MM
- COVER MATERIAL: PLASTIC
- SENSITIVITY: 110 DB



MODEL NO
ZA-750XH

P R O F E S S I O N A L
COMPRESSION DRIVER

IMPROVED DESIGN. IMPROVED PERFORMANCE



HIGH QUALITY
DRIVER



EASY TO
INSTALLATION



POWERFUL
FERRITE



**EXCLUSIVE FERRITE
DRIVER SPEAKER**






EASY MOUNTING TYPE

2" EXIT THROAT

POWERFUL FERRITE MAGNET

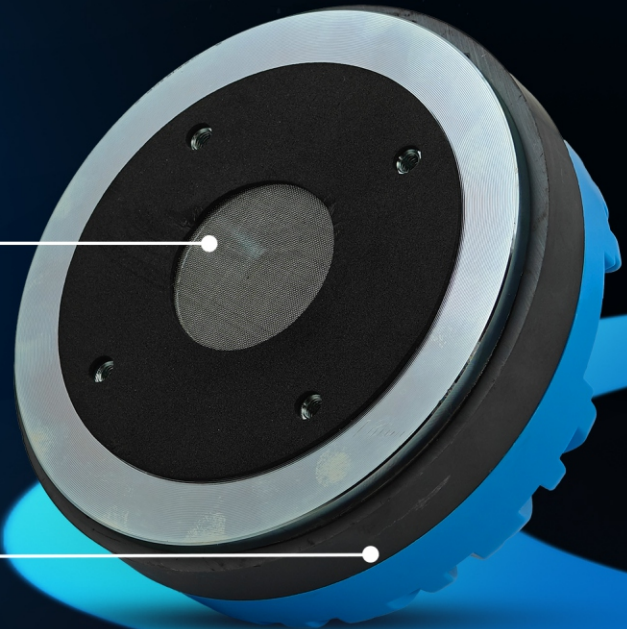

TECHNICAL SPECIFICATIONS

- EXIT THROAT: **2 INCH**
- NOMINAL IMPEDANCE: **8 Ω**
- RMS POWER HANDLING: **125WATTS**
- MAX POWER HANDLING: **700WATTS**
- SENSITIVITY @1W/1M: **110 DB**
- USABLE FREQUENCY RANGE: **0.5-18KHZ**
- VOICE COIL DIAMETER: **2.85 INCH**
- VOICE COIL MATERIAL: **CCAW**
- VOICE COIL FORMER: **KAPTON**
- FLUX DENSITY: **1.75 T**
- MAGNET MATERIAL: **FERRITE**
- DIAPHRAGM MATERIAL: **TITANIUM**
- MOUNTING TYPE: **BLOT ON**
- COVER MATERIAL: **PLASTIC**



MODEL NO
ZA-550G

P R O F E S S I O N A L
COMPRESSION DRIVER

IMPROVED DESIGN. IMPROVED PERFORMANCE



HIGH QUALITY
DRIVER



EASY TO
INSTALLATION




POWERFUL
FERRITE



**EXCLUSIVE FERRITE
DRIVER SPEAKER**



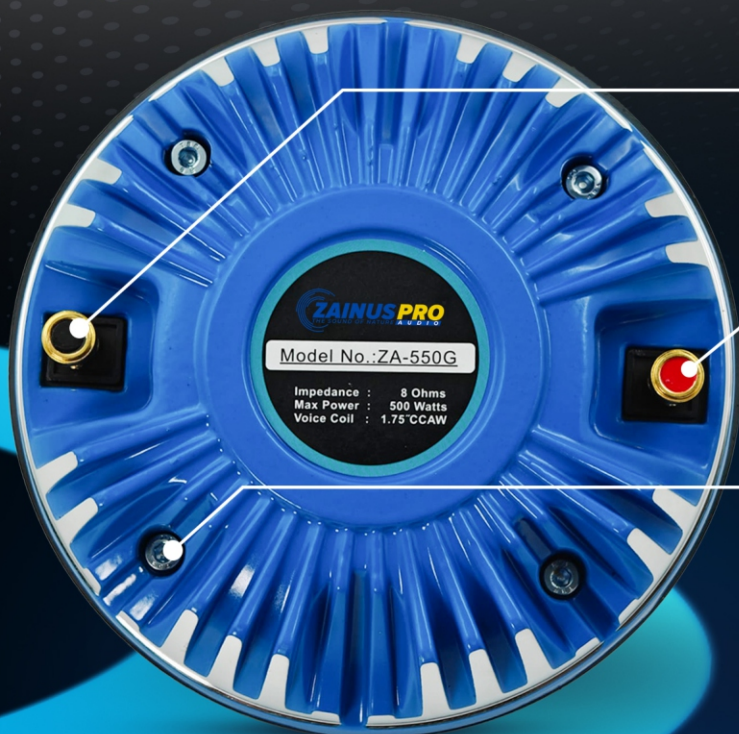

EASY MOUNTING TYPE

2" EXIT THROAT

POWERFUL FERRITE MAGNET



TECHNICAL SPECIFICATIONS

- EXIT THROAT: **2 INCH**
- NOMINAL IMPEDANCE: **8 Ω**
- RMS POWER HANDLING: **80WATTS**
- MAX POWER HANDLING: **500WATTS**
- SENSITIVITY @1W/1M: **109 DB**
- USABLE FREQUENCY RANGE: **1.0-20KHZ**
- VOICE COIL DIAMETER: **2 INCH**
- VOICE COIL MATERIAL: **CCAW**
- VOICE COIL FORMER: **KAPTON**
- FLUX DENSITY: **1.65 T**
- MAGNET MATERIAL: **FERRITE**
- DIAPHRAGM MATERIAL: **TITANIUM**
- MOUNTING TYPE: **SCREW ON**
- COVER MATERIAL: **ALUMINIUM**



MODEL NO
ZA-550XH

P R O F E S S I O N A L
COMPRESSION DRIVER

IMPROVED DESIGN. IMPROVED PERFORMANCE



HIGH QUALITY
DRIVER



EASY TO
INSTALLATION



POWERFUL
FERRITE



**EXCLUSIVE FERRITE
DRIVER SPEAKER**





Model No.: ZA-550XH

Impedance : 8 Ohms
Max Power : 500 Watts
Voice Coil : 1.75" CCAW

EASY MOUNTING TYPE

2" EXIT THROAT

POWERFUL FERRITE MAGNET



TECHNICAL SPECIFICATIONS

- EXIT THROAT: **2 INCH**
- NOMINAL IMPEDANCE: **8 Ω**
- RMS POWER HANDLING: **80WATTS**
- MAX POWER HANDLING: **500WATTS**
- SENSITIVITY @1W/1M: **109 DB**
- USABLE FREQUENCY RANGE: **1.0-20KHZ**
- VOICE COIL DIAMETER:- **2 INCH**
- VOICE COIL MATERIAL: **CCAW**
- VOICE COIL FORMER: **KAPTON**
- FLUX DENSITY: **1.65 T**
- MAGNET MATERIAL: **FERRITE**
- DIAPHRAGM MATERIAL: **TITANIUM**
- MOUNTING TYPE: **SCREW ON**
- COVER MATERIAL: **PLASTIC**



MODEL NO
ZA-750G

P R O F E S S I O N A L
COMPRESSION DRIVER

IMPROVED DESIGN. IMPROVED PERFORMANCE



HIGH QUALITY
DRIVER



EASY TO
INSTALLATION




POWERFUL
FERRITE



**EXCLUSIVE FERRITE
DRIVER SPEAKER**



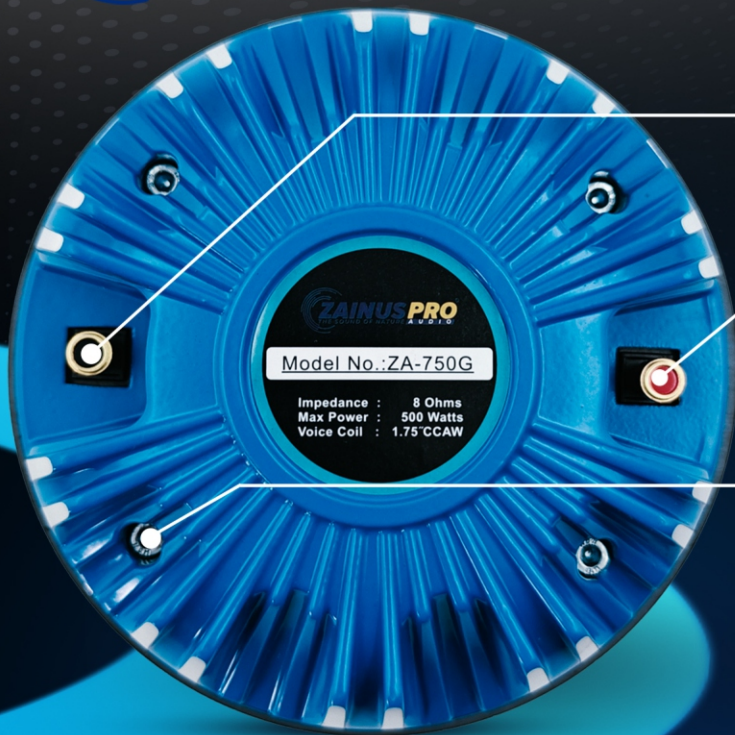


Model No.:ZA-750G

Impedance : 8 Ohms
Max Power : 500 Watts
Voice Coil : 1.75"CCA

EASY MOUNTING TYPE

2" EXIT THROAT

POWERFUL FERRITE MAGNET

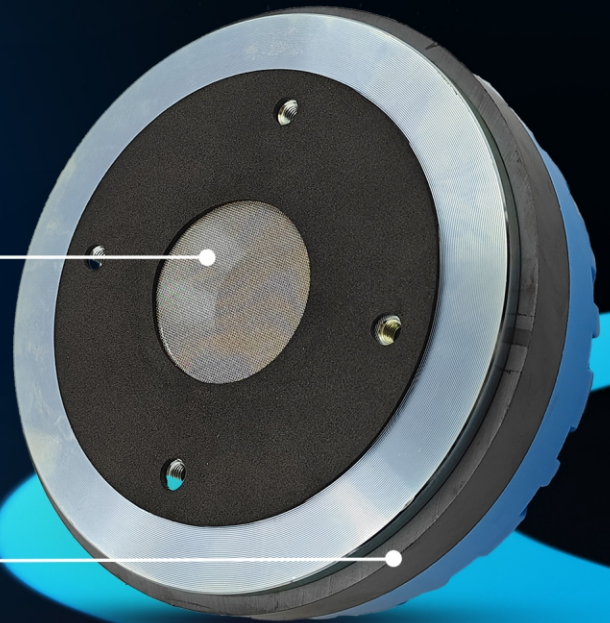

TECHNICAL SPECIFICATIONS

- EXIT THROAT: **2 INCH**
- NOMINAL IMPEDANCE: **8 Ω**
- RMS POWER HANDLING: **80WATTS**
- MAX POWER HANDLING: **500WATTS**
- SENSITIVITY @1W/1M: **109 DB**
- USABLE FREQUENCY RANGE: **1.0-20KHZ**
- VOICE COIL DIAMETER: **2 INCH**
- VOICE COIL MATERIAL: **CCA**
- VOICE COIL FORMER: **KAPTON**
- FLUX DENSITY: **1.65 T**
- MAGNET MATERIAL: **FERRITE**
- DIAPHRAGM MATERIAL: **TITANIUM**
- MOUNTING TYPE: **SCREW ON**
- COVER MATERIAL: **ALUMINIUM**