



2025 PRODUCT OVERVIEW
CATALOGUE

CRAFTING WORLD-CLASS SPEAKERS
FOR THE TRUE AUDIO EXPERIENCE





T A B L E C O N T E N T

1
PAGE

ZAINUS
Introduction

2-3
PAGE

ZA-12FW76
12 inch

4-5
PAGE

ZA-12VX88
12 inch

6-7
PAGE

ZA-15FW76
15 inch

8-9
PAGE

ZA-15TW600
15 inch

10-11
PAGE

ZA-15X400H
15inch

12-13
PAGE

ZA-18X451
18 inch (BLUE)

14-15
PAGE

ZA-18X451
18 inch (BLACK)

16-17
PAGE

ZA-1852PD
18 inch

18-19
PAGE

ZA-1862PD
18 inch

EVERY SPEAKER HAS ITS PATH
DEFINED BY ITS SOUND, DRIVEN BY
ITS SPECS



INTRODUCTION

ZAINUS PRO – PRECISION. POWER. PERFECTION.

Zainus Pro is a premium speaker brand dedicated to delivering world-class audio performance for professionals who demand nothing but excellence. With a focus on precision engineering and high-quality materials, Zainus Pro speakers are built to offer crystal-clear sound clarity, deep and powerful bass response, and unmatched durability in every environment.


Each speaker is carefully crafted using high-grade components and advanced acoustic technology to ensure consistent performance across a wide range of professional audio applications.

Whether it's for DJs performing in high-energy venues, live sound setups in large outdoor spaces, or critical studio monitoring, Zainus Pro is designed to exceed expectations and meet international standards of performance and reliability.

The brand represents a seamless blend of cutting-edge innovation and refined craftsmanship, making every unit not just a speaker, but a statement of professional quality and sonic excellence.

Trusted by sound engineers, performers, and audio enthusiasts alike, Zainus Pro stands for durability, clarity, and power — built to perform under pressure, engineered to last through years of use, and crafted to deliver a truly immersive sound experience every time.

ZAINUS PRO – MADE FOR THOSE
WHO SETTLE FOR NOTHING LESS THAN
PERFECTION

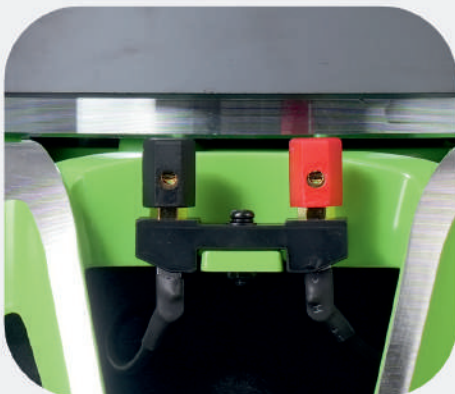

Secure, high-conductivity terminal for powerful, distortion-free speaker performance.



High-performance ferrite magnet for premium sound in speakers




High-quality precision spider for voice coil alignment and clear sound




SPECIFICATION

NOMINAL DIAMETER	12 INCH
IMPEDANCE	8 Ω
POWER (RMS) & (MAX)	400W / 800W
SENSITIVITY (1W/1m)	96.8dB
FREQUENCY RANGE	35-600 Hz
VOICE COIL & MATERIAL	3 INCH I/O / CCAW
MAGNET SIZE & TYPE	F190*25 mm / Ferrite - Y35 Grade
GROSS & NET WEIGHT	7.300 KG / 6.550 KG

DIMENSION

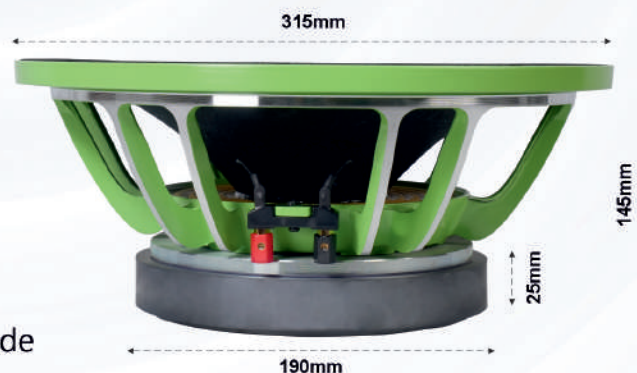

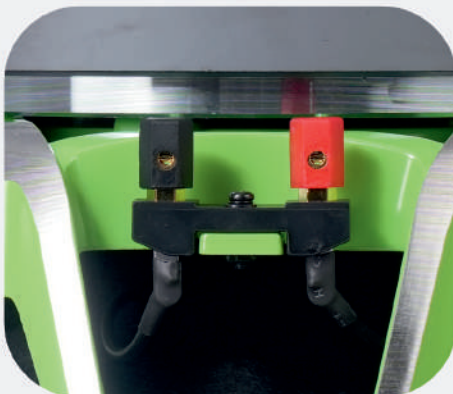

Secure, high-conductivity terminal for powerful, distortion-free speaker performance.



High-performance ferrite magnet for premium sound in speakers




High-quality precision spider for voice coil alignment and clear sound




SPECIFICATION

NOMINAL DIAMETER	12 INCH
IMPEDANCE	8 Ω
POWER (RMS) & (MAX)	500W / 1000W
SENSITIVITY (1W/1m)	97dB
FREQUENCY RANGE	35-600 Hz
VOICE COIL & MATERIAL	3.5 INCH I/O / COPPER
MAGNET SIZE & TYPE	F200*25 mm / Ferrite - Y35 Grade
GROSS & NET WEIGHT	8.300 KG / 7.500 KG

DIMENSION

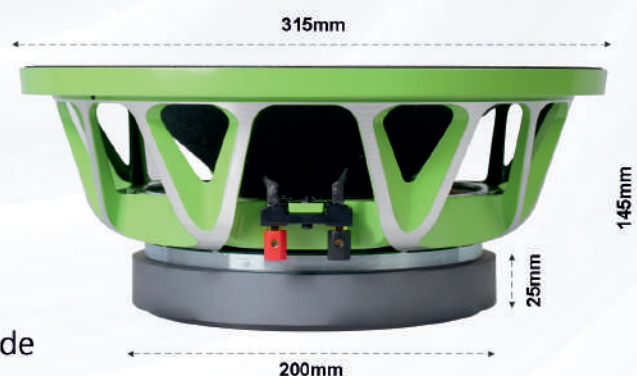


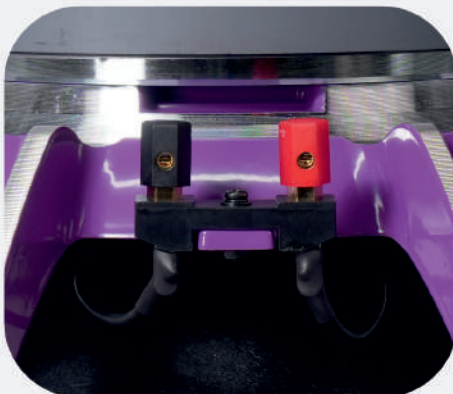

Secure, high-conductivity terminal for powerful, distortion-free speaker performance.



High-performance ferrite magnet for premium sound in speakers

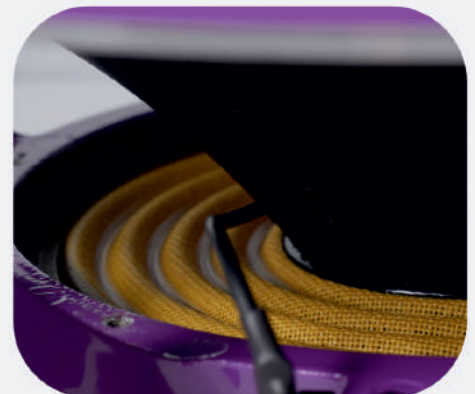


High-quality precision spider for voice coil alignment and clear sound




SPECIFICATION

NOMINAL DIAMETER	15 INCH
IMPEDANCE	8 Ω
POWER (RMS) & (MAX)	400W / 800W
SENSITIVITY (1W/1m)	96.8dB
FREQUENCY RANGE	35-800 Hz
VOICE COIL & MATERIAL	3 INCH I/O / CCAW
MAGNET SIZE & TYPE	F190*25 mm / Ferrite - Y35 Grade
GROSS & NET WEIGHT	7.700 KG / 6.850 KG

DIMENSION

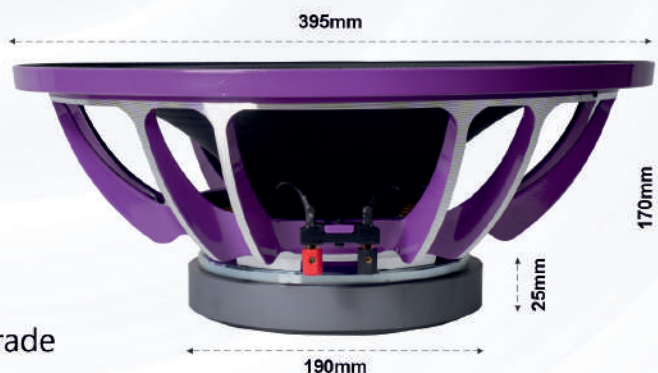

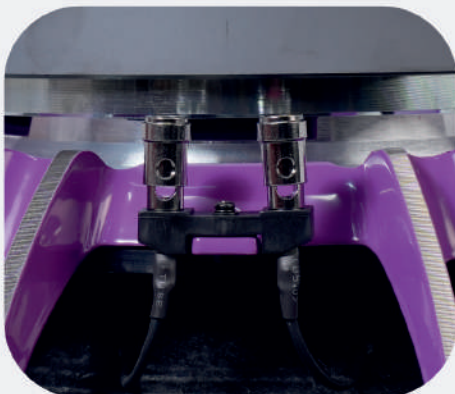

Secure, high-conductivity terminal for powerful, distortion-free speaker performance.



High-performance ferrite magnet for premium sound in speakers




High-quality precision spider for voice coil alignment and clear sound




SPECIFICATION

NOMINAL DIAMETER	15 INCH
IMPEDANCE	8 Ω
POWER (RMS) & (MAX)	600W / 1200W
SENSITIVITY (1W/1m)	96.8dB
FREQUENCY RANGE	35-800 Hz
VOICE COIL & MATERIAL	4 INCH I/O / COPPER
MAGNET SIZE & TYPE	F220*25 mm / Ferrite - Y35 Grade
GROSS & NET WEIGHT	12.100 KG / 11.100 KG

DIMENSION

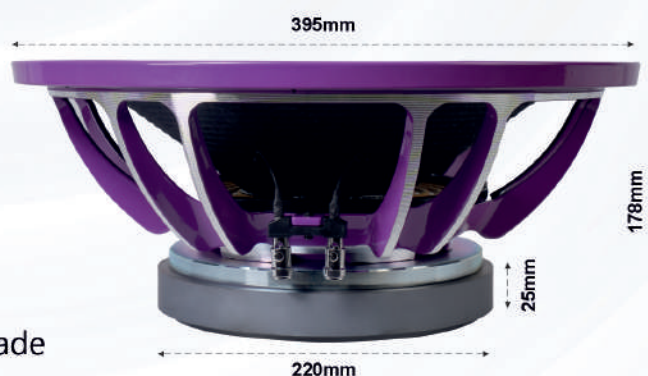


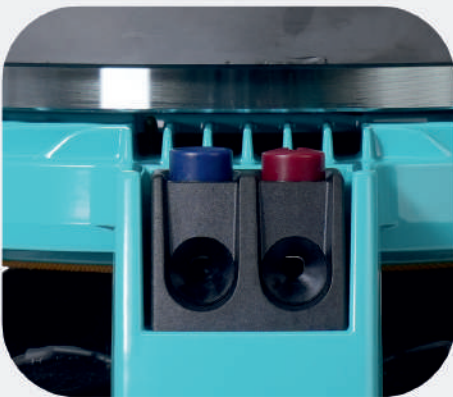


Secure, high-conductivity terminal for powerful, distortion-free speaker performance.



High-performance ferrite magnet for premium sound in speakers

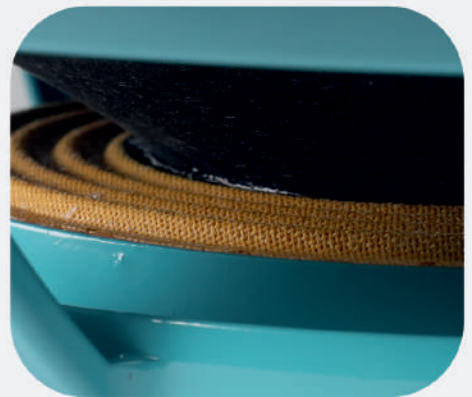


High-quality precision spider for voice coil alignment and clear sound

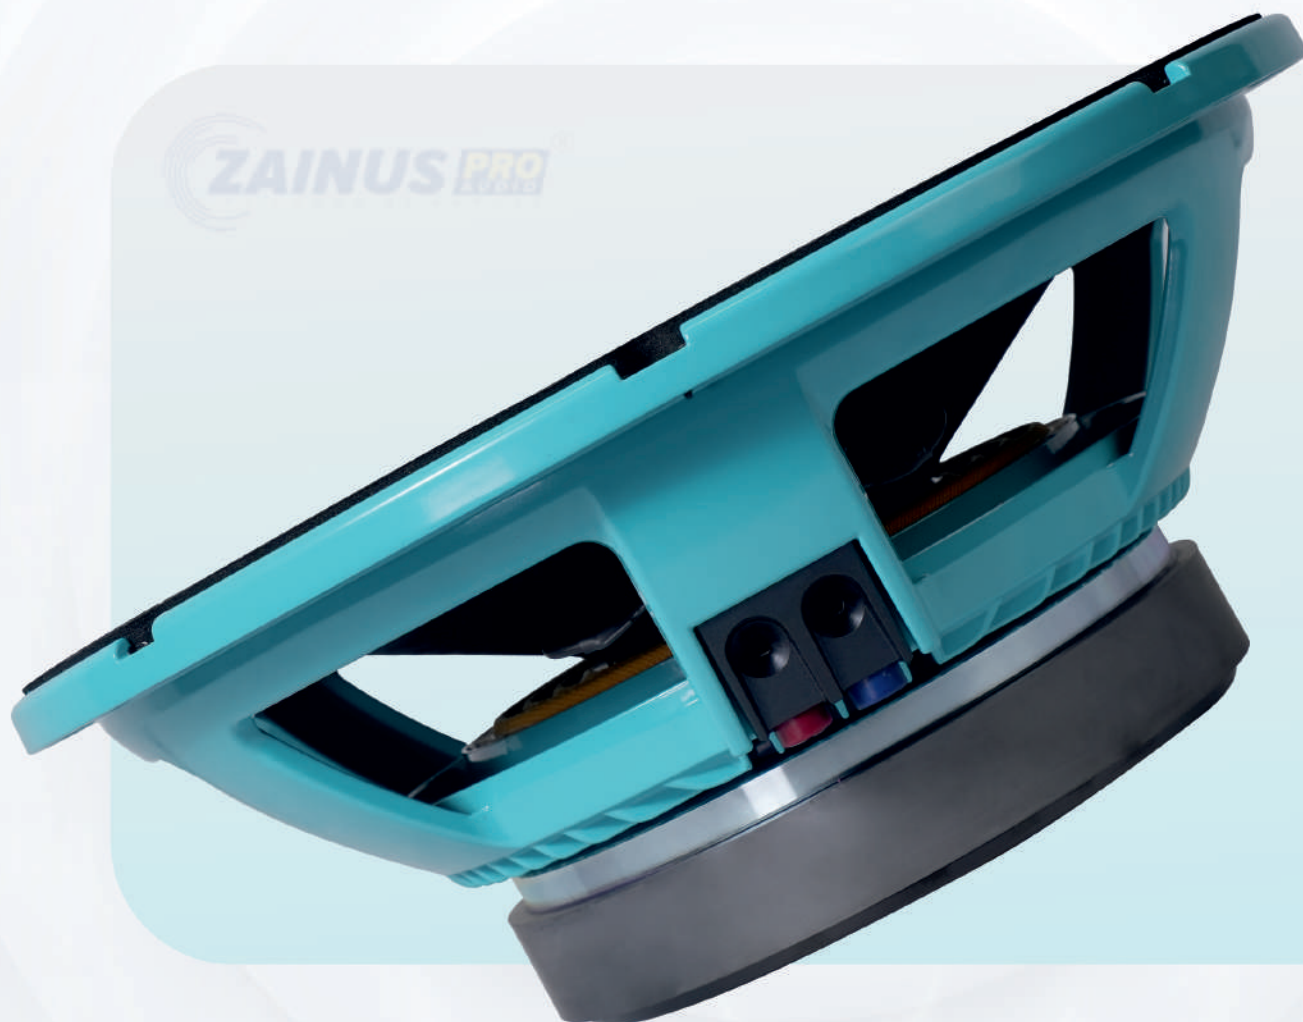

SPECIFICATION

NOMINAL DIAMETER	15 INCH
IMPEDANCE	8 Ω
POWER (RMS) & (MAX)	1000W / 2000W
SENSITIVITY (1W/1m)	96.8dB
FREQUENCY RANGE	35-900 Hz
VOICE COIL & MATERIAL	4 INCH I/O / COPPER
MAGNET SIZE & TYPE	F220*30 mm / Ferrite - Y35 Grade
GROSS & NET WEIGHT	13.250 KG / 12.250 KG

DIMENSION

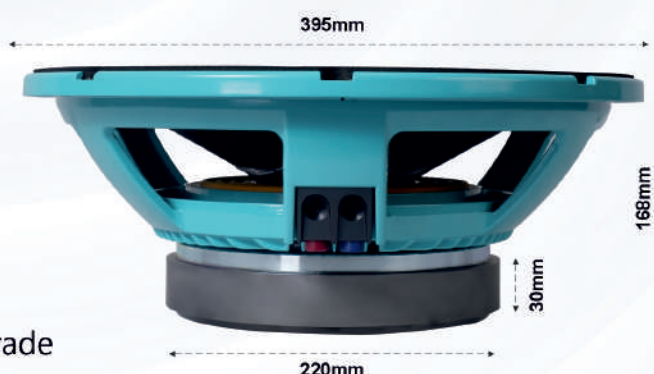




Secure, high-conductivity terminal for powerful, distortion-free speaker performance.



High-performance ferrite magnet for premium sound in speakers

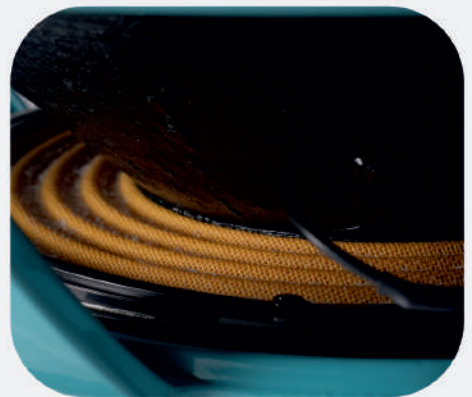


High-quality precision spider for voice coil alignment and clear sound




SPECIFICATION

NOMINAL DIAMETER	18 INCH
IMPEDANCE	8 Ω
POWER (RMS) & (MAX)	1800W / 3600W
SENSITIVITY (1W/1m)	96.8dB
FREQUENCY RANGE	35-1000 Hz
VOICE COIL & MATERIAL	4.5 INCH I/O / COPPER
MAGNET SIZE & TYPE	F250*30 mm / Ferrite - Y35 Grade
GROSS & NET WEIGHT	19.350 KG / 16.750 KG

DIMENSION

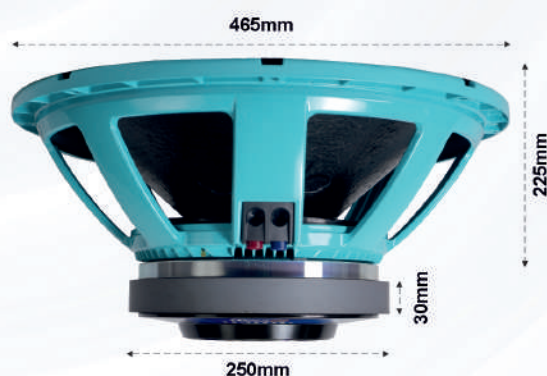

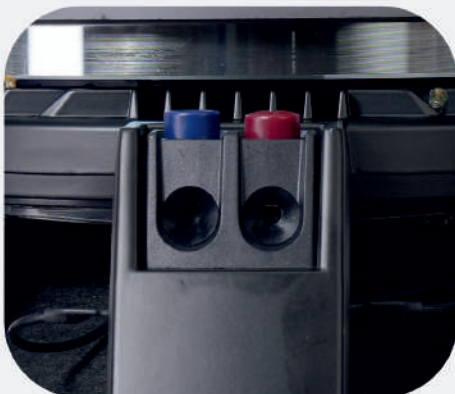

Secure, high-conductivity terminal for powerful, distortion-free speaker performance.



High-performance ferrite magnet for premium sound in speakers




High-quality precision spider for voice coil alignment and clear sound




SPECIFICATION


NOMINAL DIAMETER	18 INCH
IMPEDANCE	8 Ω
POWER (RMS) & (MAX)	1800W / 3600W
SENSITIVITY (1W/1m)	96.8dB
FREQUENCY RANGE	35-1000 Hz
VOICE COIL & MATERIAL	4.5 INCH I/O / COPPER
MAGNET SIZE & TYPE	F250*30 mm / Ferrite - Y35 Grade
GROSS & NET WEIGHT	19.350 KG / 16.750 KG

DIMENSION

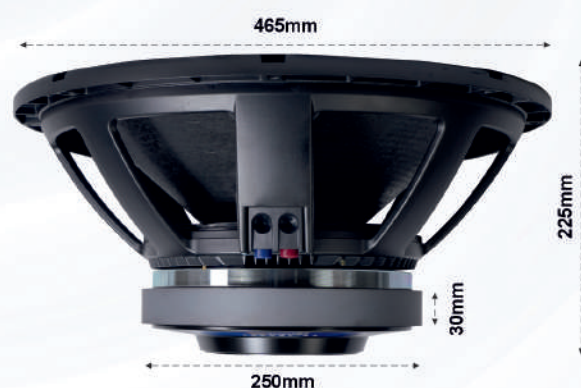

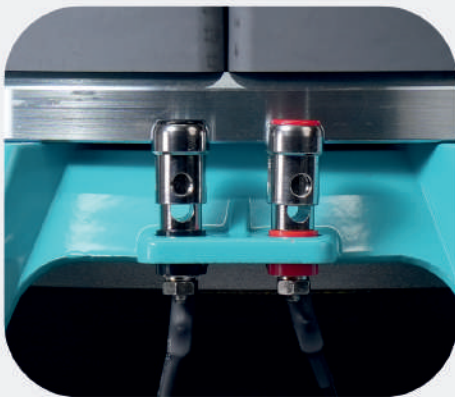

Secure, high-conductivity terminal for powerful, distortion-free speaker performance.

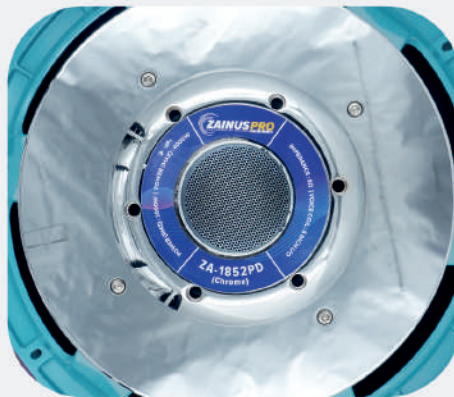

High-performance ferrite magnet for premium sound in speakers




High-quality precision spider for voice coil alignment and clear sound



SPECIFICATION


NOMINAL DIAMETER	18 INCH
IMPEDANCE	8 Ω
POWER (RMS) & (MAX)	2000W / 4000W
SENSITIVITY (1W/1m)	97dB
FREQUENCY RANGE	35-1000 Hz
VOICE COIL & MATERIAL	5 INCH I/O / COPPER
MAGNET SIZE & TYPE	F280*25 mm / Ferrite - Y35 Grade
GROSS & NET WEIGHT	23.550 KG / 19.950 KG

DIMENSION

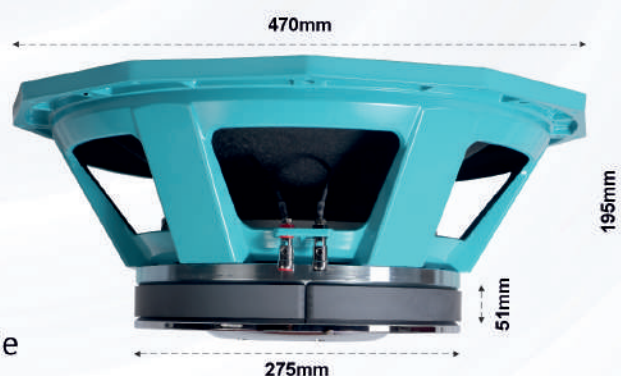



Secure, high-conductivity terminal for powerful, distortion-free speaker performance.

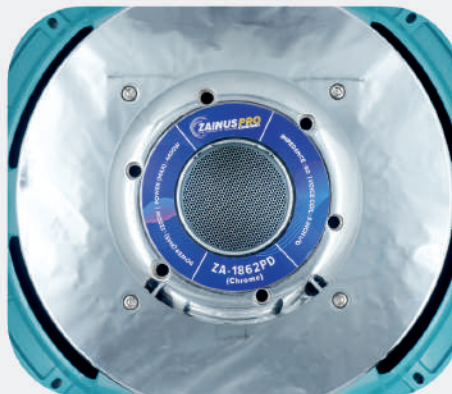

High-performance ferrite magnet for premium sound in speakers




High-quality precision spider for voice coil alignment and clear sound



SPECIFICATION

NOMINAL DIAMETER	18 INCH
IMPEDANCE	8 Ω
POWER (RMS) & (MAX)	2200W/4400W
SENSITIVITY (1W/1m)	97dB
FREQUENCY RANGE	35-1000 Hz
VOICE COIL & MATERIAL	5 INCH I/O / COPPER
MAGNET SIZE & TYPE	F280*30 mm / Ferrite - Y35 Grade
GROSS & NET WEIGHT	24.750 KG / 22.150 KG

DIMENSION

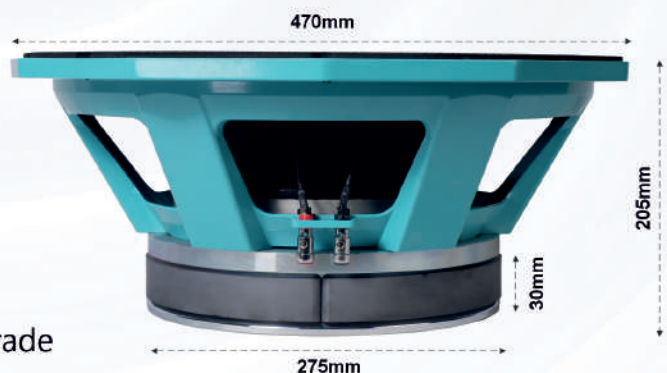



CRAFTING **WORLD-CLASS SPEAKERS** FOR
THE TRUE AUDIO EXPERIENCE

www.zainuspro.com